

SAVE THESE INSTRUCTIONS





CAUTION: RISK OF FIRE:


Never replace a Xenon (Xelogen) lamp with a regular Halogen lamp. A regular Halogen lamp requires a protective glass shield.

- This product must be installed by a qualified electrician.
- Turn off power at circuit breaker before installing.
- To reduce risk of fire or electrical shock use this fixture indoors only.
- This product is **ETL** listed and suitable only for indoor dry locations and approved for use at any height above the finished floor.
- Use MAX 35 Watt, Type Xelogen (Xenon) Bi-Pin Lamp.


ADJUST THE FIXTURE HEIGHT

- 1 Feed the fixture coaxial cable through all the pieces as shown in the figure on the right.
- 2 Cut the coaxial cable to the desired length with a sharp cutter. The overall fixture height is measured from bottom of the outer glass shade to end of the coaxial cable.

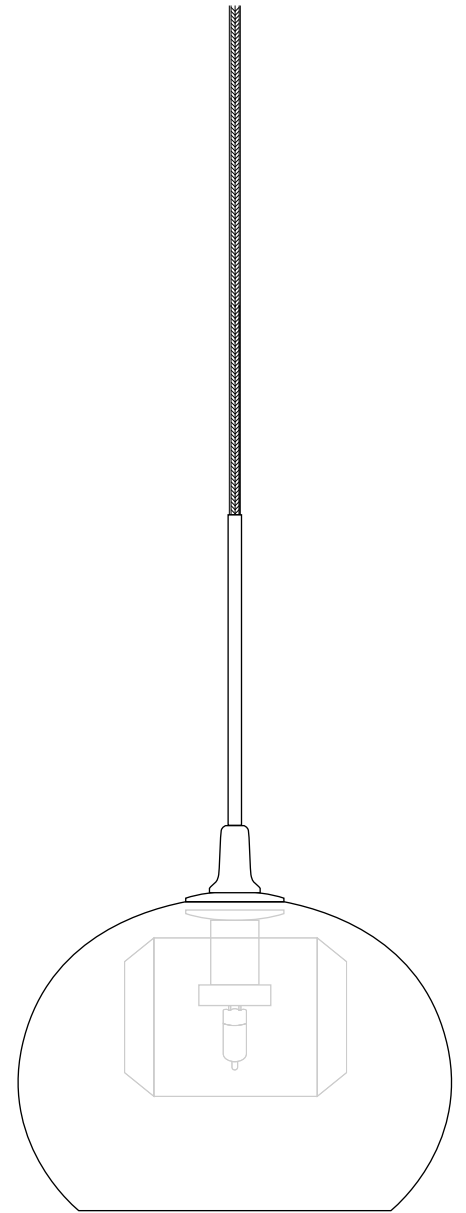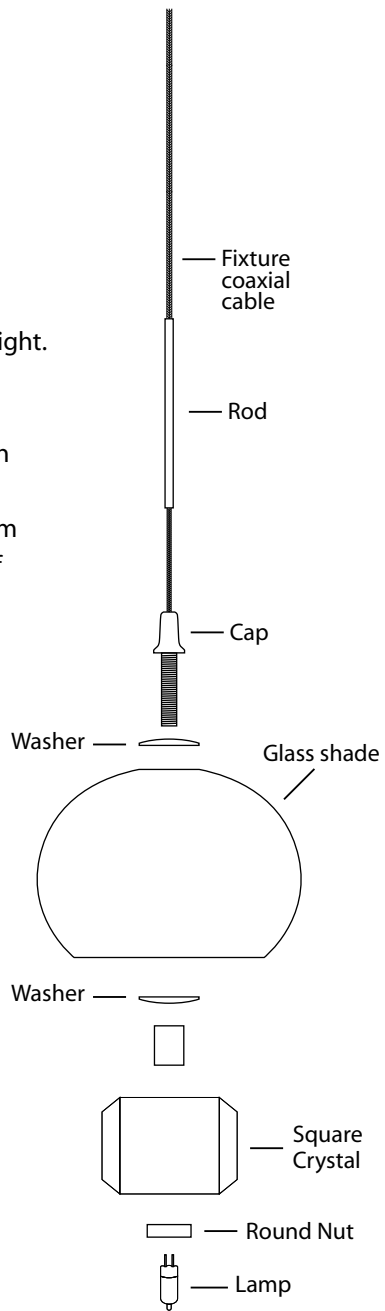

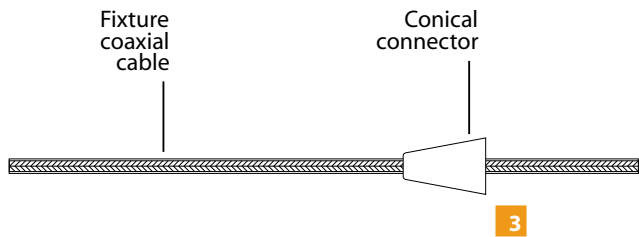

3 Insert the fixture coaxial cable through the conical connector

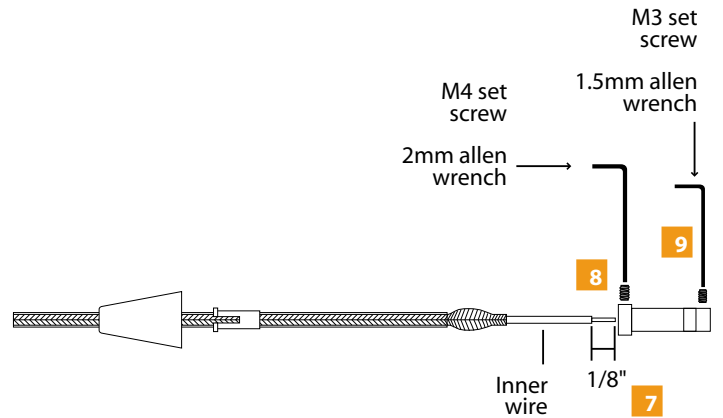


7 Strip 1/8" from end of the inner wire. Make sure that the stripped portion is not greater than 3/16".

8 Loosen (Do Not Remove) the M4 set screw with the provided 2mm Allen wrench.


9 Remove the M3 set screw with the provided 1.5mm Allen wrench.



4 Insert the coaxial cable through the flared end of the strain relief.

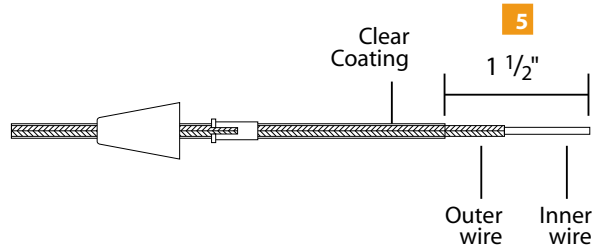


5 Strip 1 1/2" from end of clear coating.

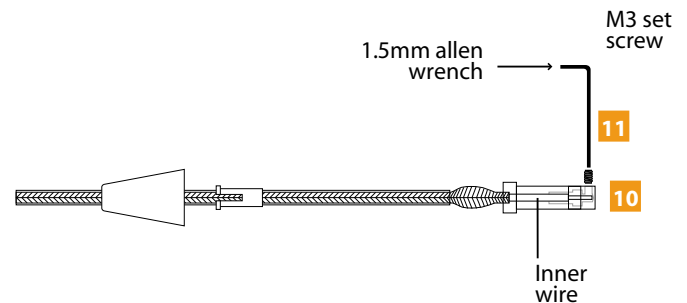


10 Look through the set screw hole to make sure that the stripped portion of the inner wire contacts end of the connector.


11 Hold the coaxial cable in place; replace and tighten the M3 set screw with the 1.5MM Allen wrench. Lightly tug on the coaxial cable to make sure that the set screw connection is tight.

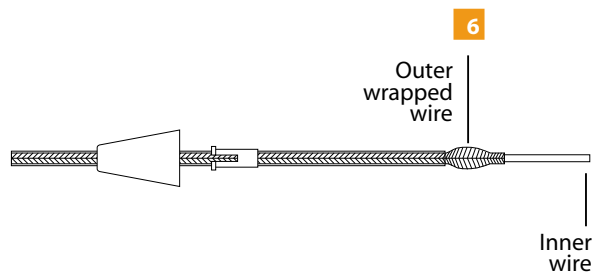

6 Slide the outer wrapped wire back to expose the inner wire.

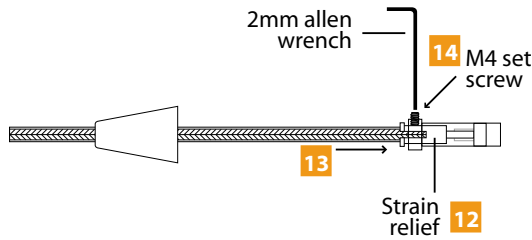

- 12** The strain relief slots should be rotated 90° away from the M4 set screw.
- 13** Slide and push the strain relief completely into the connector. This will force the outer wrapped wire to be inserted into the connector.
- 14** Tighten the M4 set screw with the 2mm allen wrench so that the strain relief holds the outer wrapped wire in place.



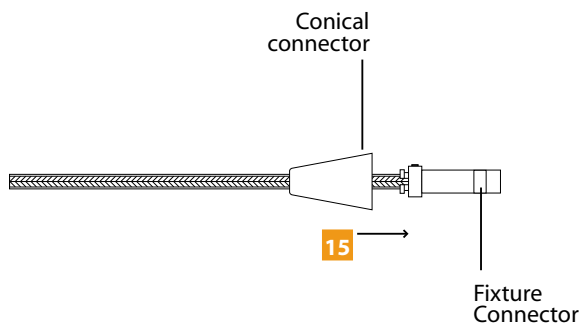


- 15** Slide the conical connector over the fixture connector.
To install the fixture, refer to the instructions provided with the system.

SAVE THESE INSTRUCTIONS

INSTALL THE LAMP

- 16** Use the "U" tool to install the nut inside the square crystal.

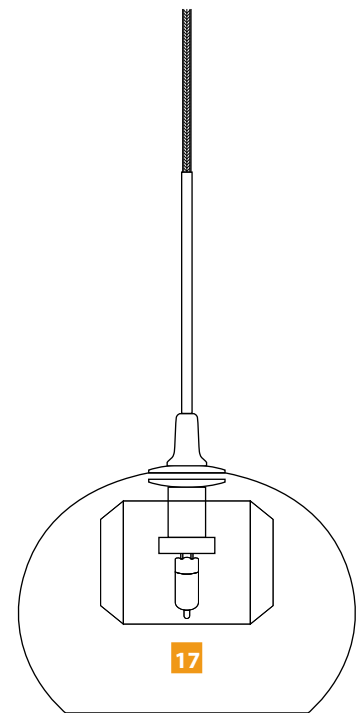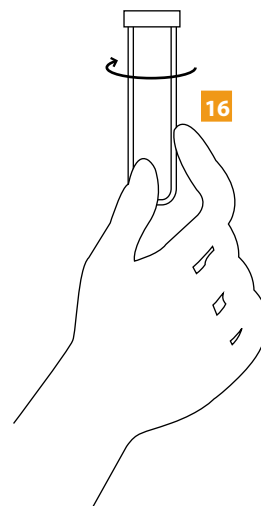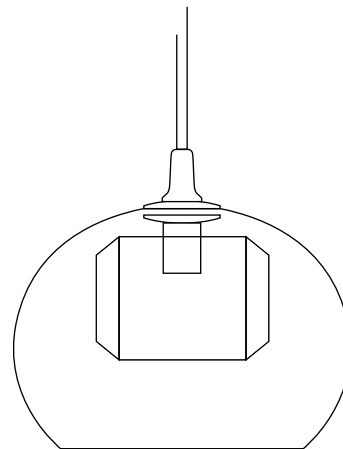

- 17** Install the lamp into socket. insure not to touch lamp directly with fingers.

NOTE:
Use only your fingers and soft cloth to replace the lamp.

Use MAX 35 Watt,
Type Xelogen
(Xenon) Bi-Pin Lamp.

WARNING: RISK OF FIRE
Never replace a Xenon (Xelogen) lamp with a regular Halogen lamp. A regular Halogen lamp requires a protective glass shield.