


LMRTLDETGD4



LMRTLDG95CR4

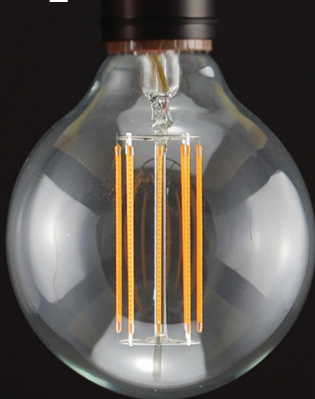


LMRTLDETCR4



LMRTLDT10CR8



LMRTLDT10CR6




**LMRTLDETGD4**

Gold ST58 Edison Style  
120 volts /4 Watts  
2200K, 80 CRI, 240 Lumens  
E26 Base, Dimmable  
Average life 25,000 hours  
58 mm (Diameter ) x 127 mm (Length)



**LMRTLDG95CR4**

Clear G95 Globe.  
120 volts /4 Watts  
2700K, 80 CRI, 360 Lumens  
E26 Base, Dimmable  
Average life 25,000 hours  
95 mm (Diameter ) x 135 mm (Length)



**LMRTLDETCR4**

Clear ST58 Edison Style  
120 volts /4 Watts  
2700K, 80 CRI, 360 Lumens  
E26 Base, Dimmable  
Average life 25,000 hours  
58 mm (Diameter ) x 127 mm (Length)



**LMRTLDT10CR8**

Clear T10 Tubular  
120 Volts, 8 Watts  
2700K, 83 CRI, 800 Lumens  
E26 Base, Dimmable  
Average Life 30,000 hours  
30mm Diameter x 185mm Length



**LMRTLDT10CR6**

Clear T10 Tubular  
120 Volts, 6 Watts  
2700K, 82 CRI, 600 Lumens  
E26 Base, Dimmable  
Average Life 30,000 hours  
30mm Diameter x 185mm Length



**LMRTLDT10GD6**

Gold T10 Tubular  
120 Volts, 6 Watts  
2200K, 82 CRI, 400 Lumens  
E26 Base, Dimmable  
Average Life 30,000 hours  
30mm Diameter x 185mm Length

\* Additional lamps Available-Consult Factory