

Installation instructions for Universal Stone Lighting EZ Jack

SAVE THESE INSTRUCTIONS




CAUTION: RISK OF FIRE:

Never replace a Xenon (Xelogen) lamp with a regular Halogen lamp. A regular Halogen lamp requires a protective glass shield.

This product is ETL listed and suitable only for indoor dry locations and approved for use at any height above the finished floor.


Visit <https://tinyurl.com/ezjack> for a video installation tutorial

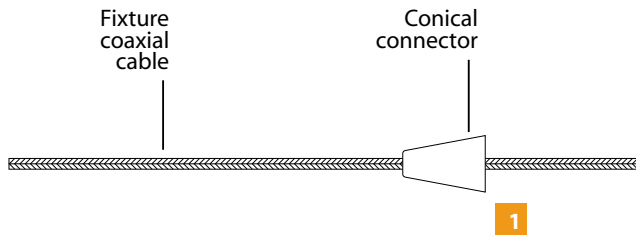


- 1 Insert the fixture coaxial cable through the conical connector



- 2 Insert the coaxial cable through the flared end of the strain relief.

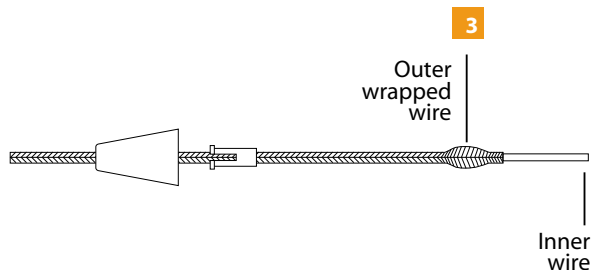


- 3 Slide the outer wrapped wire back to expose the inner wire.

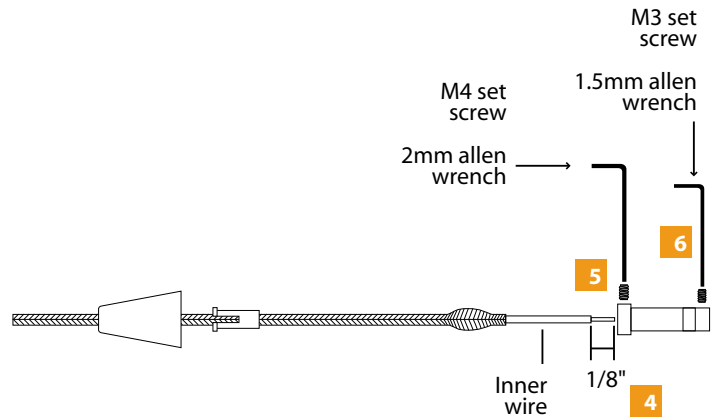

- 4 Strip 1/8" from end of the inner wire. Make sure that the stripped portion is not greater than 3/16".


- 5 Loosen (Do Not Remove) the M4 set screw with the provided 2mm Allen wrench.

- 6 Remove the M3 set screw with the provided 1.5mm Allen wrench.

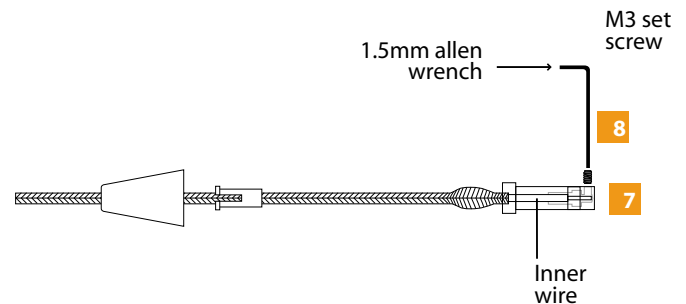


- 7 While inserting the inner wire into the connector look through the set screw hole to make sure that the stripped portion of the inner wire contacts end of the connector.

- 8 Hold the coaxial cable in place; replace and tighten the M3 set screw with the 1.5MM Allen wrench. Lightly tug on the coaxial cable to make sure that the set screw connection is tight.

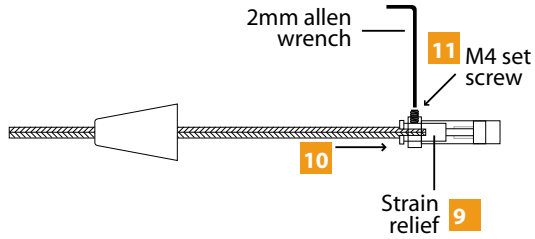

- 9** The strain relief slots should be rotated 90° away from the M4 set screw.
- 10** Slide and push the strain relief completely into the connector. This will force the outer wrapped wire to be inserted into the connector.
- 11** Tighten the M4 set screw with the 2mm allen wrench so that the strain relief holds the outer wrapped wire in place.

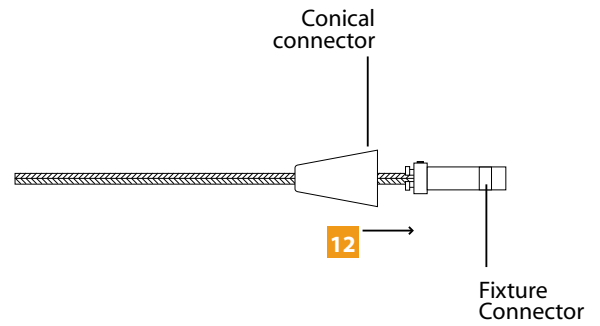

- 12** Slide the conical connector over the fixture connector.
To install the fixture, refer to the instructions provided with the system.

SAVE THESE INSTRUCTIONS

WARNING: RISK OF FIRE
Never replace a Xenon (Xelogen) lamp with a regular Halogen lamp. A regular Halogen lamp requires a protective glass shield.